



# Access Point


---

## Quick Start Guide



## Connecting the Access Point


1. Slide the O-ring into the groove in the connector.




*Note: If you choose not to install the O-ring, the Access Point will be rated to IP41, instead of IP54.*

2. Turn on the computer (laptop/desktop).
3. Plug the interface cable into the Access Point first and then into the appropriate port on the computer. The Page button blinks when the Access Point is first connected to the host.


### USB Connection:

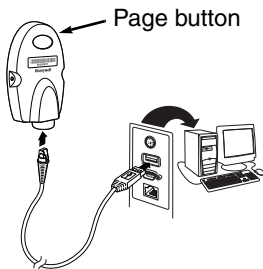


**RS232 Connection:**

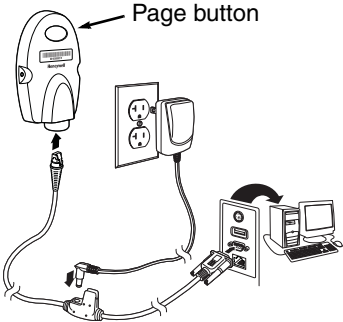

**RS485 Connection:**

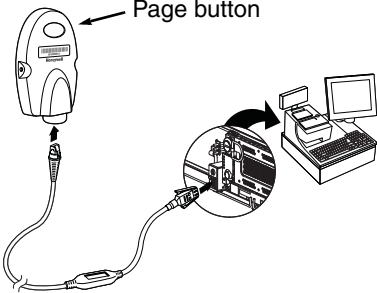


## Keyboard Wedge Connection:

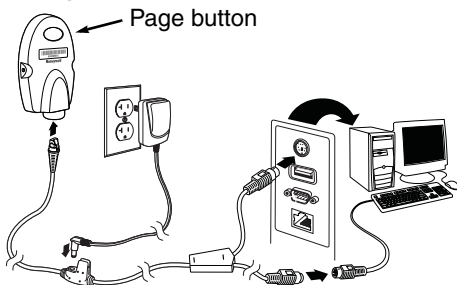

## *Linking a Xenon Scanner*

4. Scan the linking bar code on the top of the Access Point to establish a connection between the Access Point and the scanner. The scanner emits a short beep and flashes the green LED to confirm a connection with the Access Point. The Access Point's Page button light turns solid blue.

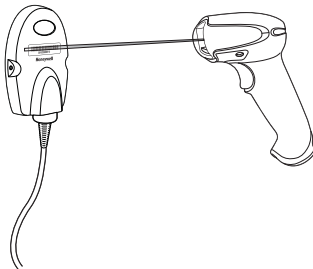

## ***Linking a 4820 Scanner***

5. Remove the 4820 Linking bar code from the Access Point kit and attach it to the Access Point. Scan the 4820 Linking bar code to establish a connection between the Access Point and the 4820 scanner. The scanner emits a short beep and flashes the green LED to confirm a connection with the Access Point. The Access Point's Page button remains blue.

If you have difficulty connecting with your 4820, it may be due to Code XML software in your scanner. Scan the following bar code, then scan the 4820 Linking bar code. These steps may resolve this connection problem.



**Code XML Off**

## ***Managing Connections***

### ***Auto Reconnect Mode***

By default, the Access Point is set to **Auto Reconnect On**, so the scanner begins the relink process immediately, when a connection to the Access Point is lost. If you do not want to relink automatically, scan the **Auto Reconnect Off** bar code.



**\* Auto Reconnect On**



**Auto Reconnect Off**

## ***Changing Batteries***

If the scanner turns off due to a low battery, you can change the battery without losing the link with the Access Point, provided the scanner is in range. A few seconds after the scanner powers up, the scanner relinks to the Access Point. Refer to your User's Guide at [www.honeywellaidc.com](http://www.honeywellaidc.com) for additional information about charging the batteries.

## ***Low Power Mode***

When there is no activity within a specified time period, the scanner enters a low power mode. The default time out period is one hour. Pull the scanner's trigger to power the scanner back up. If the scanner was linked to the Access Point when it went to "sleep," it will re-link as long as it is in range.

If multiple scanners use the same Access Point, it is possible to inadvertently unlink a scanner that is in "sleep" mode, that has a dead battery, or is in the process of getting a new battery. To prevent this from happening, you can disable the sleep mode (time out) by scanning the **No Time Out** bar code below.



**No Time Out (0)**

## ***Unlinking the Scanner from Access Point***

If you know that your scanner is not going to be used for a while, you can unlink the scanner by scanning the **Unlink Scanner** bar code below.




**Unlink Scanner**

## ***Page Button***

*Note: This feature does not apply to 4820 scanners.*

When you press the Page button on the Access Point, the scanners associated with that Access Point will begin beeping (3 short and 1 long beep). If you pull the trigger on a scanner that is beeping in response, or press the Page button on the Access Point a second time, all associated scanners will stop beeping.



## ***LED Dimmer***

Scan a bar code to set the brightness of your Page button.



**LED Dimmer Off**



**LED Dimmer - Low**



**LED Dimmer - Bright**

## ***Adding Carriage Return Suffix***

If you want a carriage return (CR) to display after the bar code data on your output scan the **Add CR Suffix** bar code below. Scan the **Remove Suffix** bar code to remove the suffix.



**Add CR Suffix**

## ***Standard Product Defaults***

This bar code resets all standard product default settings.

*Note: Resetting standard defaults disconnects the scanner from the Access Point. Scan the Linking bar code to re-establish a connection. Refer to your User's Guide at [www.honeywellaidc.com](http://www.honeywellaidc.com) for additional information about product defaults.*




**Standard Product Default Settings**

## ***Additional Programming***

The Access Point has all the programming capability of a CCB01-010BT Cordless Charge Base. Refer to Cordless System Operation information in your User's Guide at [www.honeywellaidc.com](http://www.honeywellaidc.com) for programming information.

## ***Required Safety Labels***

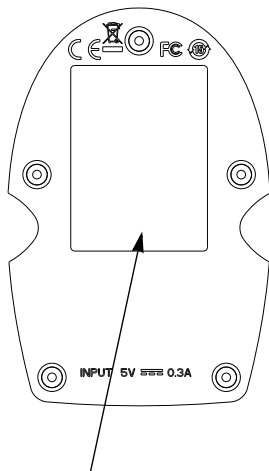

Label location for item number, serial number, revision information, compliance, and safety information

# Product Specifications

<b>Parameter</b>	<b>Specification</b>
Dimensions (Typical): Height Length Width Weight	1.1 inch (28mm) 4.3 inches (109mm) 2.8 inches (71mm) 2.3 ounces (66g)
Voltage Requirements	5 VDC $\pm$ 0.5V
Current Draw	100mA @ 5 volts typical 300mA @ 5 volts maximum
Temperature Ranges: Operating Storage	32° F to +122° F (0° C to +50° C) -40° F to +158° F (-40° C to +70° C)
Radio: Frequency Range Data Rate	2.4 to 2.5 GHz (ISM Band) Frequency Hopping Bluetooth v.2.1 33 ft. (10 m) typical Up to 1Mbps
Humidity	5 to 95% non-condensing
Mechanical Drop	Operational after 50 drops from 3.28 feet (1 m) to concrete
Vibration	5G Peak from 22Hz to 300Hz
ESD Sensitivity	Up to 15kV direct air Up to 8 kV indirect coupling plane

# **Technical Assistance**

Contact information for technical support and product service can be found at [www.honeywellaidc.com](http://www.honeywellaidc.com).

## **Limited Warranty**

Refer to [www.honeywellaidc.com/warranty\\_information](http://www.honeywellaidc.com/warranty_information) for your product's warranty information.

### **Product Agency Compliance**

#### **USA**

##### **FCC Part 15 Subpart C**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Caution: Any changes or modifications made to this equipment not expressly approved by Honeywell may void the FCC authorization to operate this equipment.



UL listed: UL60950-1.

### **Canada**

#### **Industry Canada**

This device complies with Canadian RSS-210. Operation is subject to the following conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation.

#### **Conformité à la réglementation canadienne**

Cet appareil ISM est conforme à la norme CNR-210 du Canada. Son fonctionnement est assujéti aux conditions suivantes :

1. Cet appareil ne doit pas causer de brouillage préjudiciable.
2. Cet appareil doit pouvoir accepter tout brouillage reçu, y compris le brouillage pouvant causer un fonctionnement indésirable.



### **C-UL Statement**

C-UL listed: CSA C22.2 No.60950-1-03 for I.T.E product safety.

Europe



The CE marking on the product indicates that this device is in conformity with all essential requirements of the 1999/5/EC R&TTE Directive. In addition, complies to 2006/95/EC Low Voltage Directive, when shipped with recommended power supply. For further information, contact:

Honeywell Imaging & Mobility Europe BV  
International Inc.  
Nijverheidsweg 9-13  
5627 BT Eindhoven  
The Netherlands

Honeywell shall not be liable for use of our product with equipment (i.e., power supplies, personal computers, etc.) that is not CE marked and does not comply with the Low Voltage Directive. This equipment is intended for use throughout the European Community and has been assessed to the following standards:

EN 300 328

EN 301 489-1

EN 301 489-17

EN60950-1

### **Waste Electrical and Electronic Equipment Information**

Honeywell complies with Directive 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 27 January 2003 on waste electrical and electronic equipment (WEEE).

This product has required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment, if not properly disposed.

In order to avoid the dissemination of those substances in our environment and to diminish the pressure on the natural resources, we encourage you to use the appropriate take-back systems for product disposal. Those systems will reuse or recycle most of the materials of the product you are disposing in a sound way.



The crossed out wheeled bin symbol informs you that the product should not be disposed of along with municipal waste and invites you to use the appropriate separate take-back systems for product disposal.

If you need more information on the collection, reuse, and recycling systems, please contact your local or regional waste administration.

You may also contact your supplier for more information on the environmental performances of this product.

## **Australia/NZ**



### **C-Tick Statement**

Conforms to AS/NZS 3548 EMC requirement

## **Russia**



## **Patents**

Please refer to the product packaging for patent information.

## **Disclaimer**

Honeywell International Inc. (“HII”) reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

© 20010 Honeywell International Inc. All rights reserved.

Other product names or marks mentioned in this document may be trademarks or registered trademarks of other companies and are the property of their respective owners.

Web Address: [www.honeywellaidc.com](http://www.honeywellaidc.com)