

EA30

High Performance 2D Imager



The Intermec EA30 is the new generation in 2D imaging, offering best in class motion tolerance and time to read providing a distinct performance advantage to the products in which it is integrated.

- Delivers a performance advantage as the only 2D imager to provide 50 times more motion tolerance than standard imagers
- Future-proofed imager captures images, signatures and reads 1D, 2D, composite and stacked codes
- Highly visible aimer makes intensive barcode scanning and image capture easy and comfortable
- Rugged design withstands extreme temperatures, vibrations and shock for extended use in tough environments
- Compact dimensions fit the tightest mechanical constraints
- Supports Intermec Scanner Communication Protocol (ISCP) & USB interface

Differentiation and Unparalleled Performance

The Intermec EA30 is the first and only 2D imager to provide 50 times more motion tolerance than standard 2D imagers and doesn't require barcode alignment to achieve high read rates, adding a clear performance advantage to your product.

EA30 is particularly adapted for applications where barcodes are read on the move such as picking, sorting, tracking, manufacturing, access control and retail POS. Successful barcode scanning, even under the most dynamic conditions, is made easier because the EA30 can read barcodes at up to 500 ips (12.7 m/s). The rugged EA30 also complies with the most stringent standards for shock and vibration and can successfully operate within a wide temperature range.

Highly Visible & Ergonomic Aiming System

Designed to deliver consistent performance and ease of use in the most challenging environments, the EA30 is equipped with a red continuous scanning line and highly visible pointer to facilitate successful scans in total darkness and in full sunlight. Its corner framers make image capture and multi-code reading intuitive and comfortable. Transitioning to the EA30 will be easy for your customers who are used to lasers or linear imager aimers.

Extending Your Application Reach

The EA30 can read multiple codes in one scan and can also be used in auto-triggering mode. The ability to support 1D, stacked, composite and 2D matrix codes, provides assurance your investment is protected long-term while providing immediate support for current industry standards.

Confidence Now, Protection for the Future

Compact size, standard interfaces, common development tools and software simplify integration of the EA30 into space-constrained devices. Compatibility with the Intermec ED40 High Performance decode board, the smallest USB board available, ensures that you will save room within your design and maximize the performance of the EA30 to its fullest.

The EA30 shares the same Intermec Scanner Communication Protocol with other Intermec engines, supporting enhanced and integrated design efforts across multiple product platforms.

Design

Technology: 2D imager

Light Source: Highly visible white LED.

High efficiency 100 lm/W

Aimer: 650 nm laser, Class 2

Physical Characteristics

Dimensions: 21.95 mm W x 15.3 mm D x 13 mm H
(0.86 in W x .60 in D x .51 in H)

Weight: <10 g (.35 oz)

Scanning Performance

Scan Rate: up to 60 fps / 120fps in 1D mode

Scan Angle: 34.4° (Horizontal), 22.2° (Vertical)

Optical resolution: 752 (H) x 480 (V) pixels, 256 gray levels

Min x. dimension:

1D codes 0.1 mm (4 mils)

2D codes 0.167 mm (6.6 mils)

Print contrast: Down to 30%

Motion Tolerance: Up to 500ips or 12.7m/s

Symbologies

1D symbologies: EAN/UPC, GS1 Databar (limited expanded & omni-directional), RSS, Code 39, Code 128, UCC/EAN 128, ISBN, ISBT, Interleaved/Matrix/Industrial and Standard 2 of 5, Codabar, Code 93/93i, Code 11, MSI, Plessey, Telepen, postal codes (Australian Post, BPO, Canada Post, Dutch Post, Japan Post, PostNet, Sweden Post)

2D symbologies: Data Matrix, PDF417, Micro PDF 417, Codablock, Maxicode, QR, Aztec, GS1 composite codes, Direct Part Marking Reading multicodes and barcodes on mobile phone screens available.

Interfaces

Connector: 25 pin ZIF, pitch 0.3 mm (0.12 in)

Decode and image transfer: USB interface (see ED40 Decode Board)

Intermec Scanner Control Protocol (ISCP)


Electrical Characteristics

Voltage: 3.3V- 5%/+10%

Operating Current: 300mA @ 3.3V typical

Standby current: <2mA

Typical Reading Distances

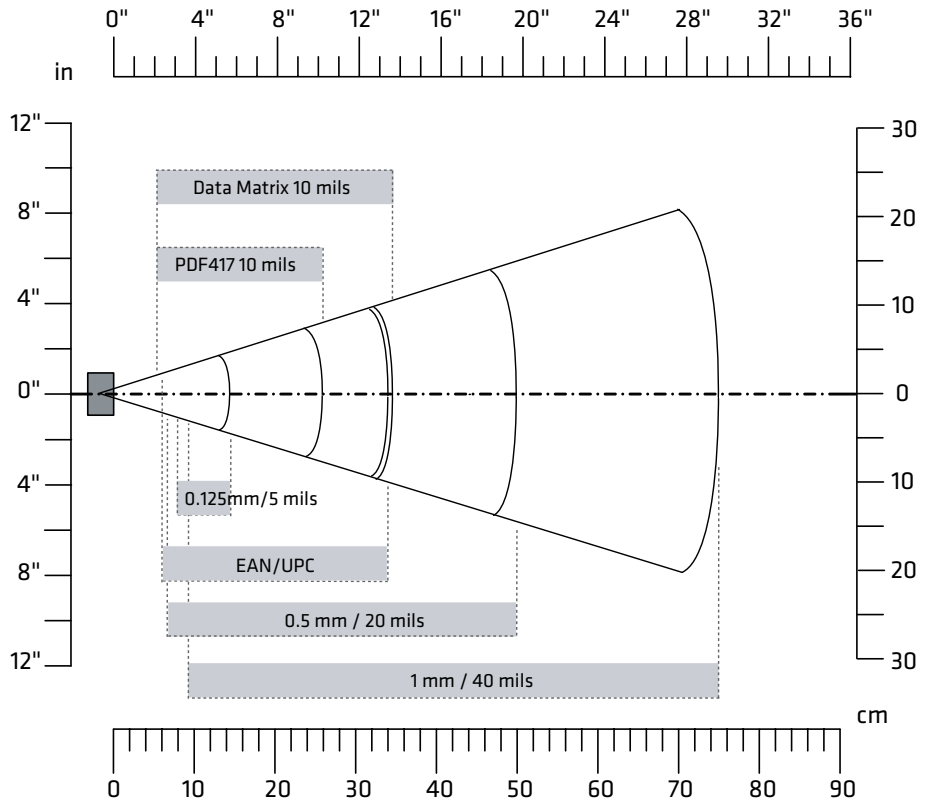

Environmental Characteristics

Ambient light: Works in any lighting conditions, from 0 to 100 000 lux

Operating temperature: -20° to 50° C (-4° to 122° F)

Storage temperature: -40° to 70° C (-40° to 158° F)

Relative humidity: 95% at 60° C (140° F)

(non-condensing), 4 days

Shock: 2000G, 0.7ms, half sinus, 6 directions

Vibration: 8G r.m.s., from 10Hz to 500Hz, 2 hours/axis, 3 axes


Regulatory Approvals

UL, cUL, VDE

Class 2 Laser/LED

RoHS

See integration guide for more details



North America

Corporate Headquarters

6001 36th Avenue West
Everett, Washington 98203
Phone: (425) 348-2600
Fax: (425) 355-9551

North Latin America

Headquarters Office
Mexico
Phone: +52 55 52-41-48-00
Fax: +52 55 52-11-81-21

South Latin America

Headquarters Office

Brazil
Phone: +55 11 3711.6770
Fax: +55 11 5502.6780

Europe/Middle East & Africa

Headquarters Office
Reading, United Kingdom
Phone: +44 118 923 0800
Fax: +44 118 923 0801

Asia Pacific

Headquarters Office
Singapore
Phone: +65 6303 2100
Fax: +65 6303 2199

Internet

www.intermec.com
Worldwide Locations:
www.intermec.com/locations

Sales

Toll Free NA: (800) 934-3163
Toll in NA: (425) 348-2726
Freephone ROW:
00 800 4488 8844
Toll ROW: +44 134 435 0296

OEM Sales

Phone: (425) 348-2762

Media Sales

Phone: (513) 874-5882

Customer Service and Support

Toll Free NA: (800) 755-5505
Toll in NA: (425) 356-1799



Copyright © 2011 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 612112-01A 03/11

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.